

- BASE for OUTDOOR use
- BASE for INDOOR use

DISTRIBUTOR/AGENT:	DATE OF ORDER:
	DATE OF DELIVERY:
	NAME OF THE ADDRESSEE/USER

MODULAR POSTURAL SYSTEM that can be positioned on INDOOR and OUTDOOR BASE



FEATURES

Postural SEAT easily reversible with SERVO-ASSISTED TILTING AND RECLINING SYSTEM

- **Tilting seating unit** operated by gas spring, **removable** thanks to a practical, safe, and foolproof attachment/detachment system, quickly reversible to face the parent (outdoor base), **equipped with a visual safety system**. The backrest is adjustable in height, the seat in depth and the width can be adjusted via multi-adjustable lateral supports. All the adjustments are precise and continuous.
- The upholstery of the seat is extremely breathable, comfortable, durable, easy to wash, and quick to dry, consisting of:
 - » **Non-removable supporting upholstery**: the texture with an essential design allows an **excellent breathability**, reducing sweating and bacterial growth. The fabric composition allows an **easy sanitization**. It **maintains performance even at high loads and is fire retardant** according to class 1 fire reaction (non-flammable combustible materials) according to Ministerial Decree June 26, 1984, and subsequent amendments.
 - » **The removable cover** is made of breathable and **highly innovative** material both internally and externally. The internal fabric is three-dimensional, lightweight, and provides high air circulation. It allows an **optimal weight distribution** and **great comfort**. The external fabric is also highly resistant to abrasion. Fireproof according to EN 1021-1:2014 and EN 1021-2:2014 standards. Washable at 40°C. Easily removable for washing with **quick drying times**.
- **Reclining backrest** with gas spring and height-adjustable precisely and continuously. The backrest has a **restraining shape** and, thanks to the resistant bearing upholstery and **aluminum bars**, provides a comfortable and breathable support.
- **Integrated headrest** in the backrest to ensure the child always has support when the seating unit is tilted and/or the backrest is reclined.
- **Includes the mod. 947 pelvic belt with variable angle.**
- **Wide and padded armrests**, adjustable in height, width, and inclination (they follow the adjustments of the pelvis lateral supports).
- Adjustable **pelvic supports** for containment in width, rotation, and depth independently.
- Height and angle-adjustable **leg rest** with physiological pivot, making the adjustment comfortable. Adjustable in depth along with the seat.
- **Adjustable single footrest with heel stops** or **adjustable separate footrests** (component mod. 957).
- **Lateral shoulder supports** mod. 967 provided as standard in the outdoor version.

OUTDOOR BASE (CRASH TESTED according to ISO 7176/19 and ANSI RESNA WC/19 standards) **parent-facing reversible**.

- Compact and lightweight **frame** with a new innovative design, easily maneuverable and foldable, with a tilt-adjustable handlebar. It **reduces depth space**.
- Solid, lightweight, and smooth-running **wheels** on all surfaces: 17 cm (6,7 in) front wheels with direction locks, 25 cm (9,8 in) rear wheels, with shock absorbers and independent drum and parking brakes.

HIGH LOW INDOOR BASE

- **Compact frame with height adjustment** - to allow approaching support and work surfaces - with gas spring adjustment while the child is seated. **The height adjustment system is internationally patented.**
- **Active tilt-in-space**: useful for positioning the child in an active position, to perform activities that stimulate straightening and activation of the posterior musculature.
- **Solid twin wheels** 7,5 cm (2,9 in), swiveling, **with rubber coating**. All equipped with parking brakes.



Attention!
Read carefully the user and maintenance manual


CHOOSE THE COLOR OF THE POSTURAL SEATING UNIT

☐ Coral pink ☐ Sky blue ☐ Brown




CHOOSE THE BASE (both can also be selected)

☐ OUTDOOR USE ☐ INDOOR USE

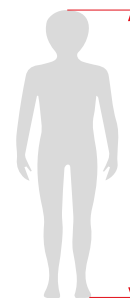

USER HEIGHT: 90-120 cm
35,4-47,2 in
MAX LOAD: 35 kg
77 lb


MEASURES in cm and (inches)

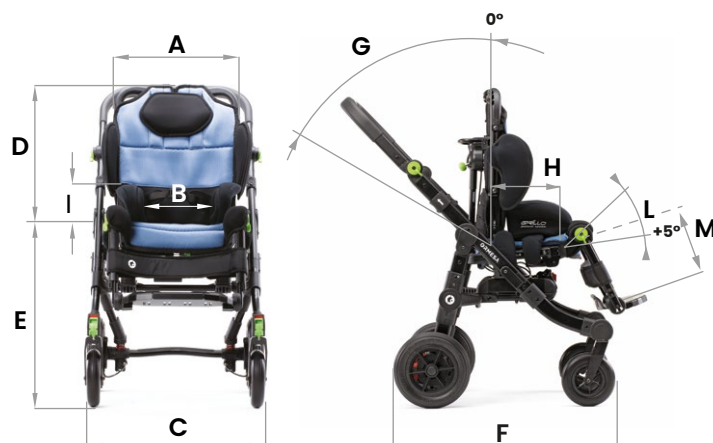

Seating unit on outdoor base



A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	Frame weight	Seating unit weight	Total weight
38 (15)	20-30 (7,8-11,8)	57 (22,4)	48-62 (18,8-24,4)	52 (20,4)	72 (28,3)	45°	20-30 (7,8-11,8)	13-16,5 (5,1-6,4)	30°	21-31 (8,2-12,2)	33 (12,9)	74 (29,1)	69 (27,1)	49 (19,2)	57 (22,4)	80 (31,4)	10,8 kg (23,8 lb)	11,3 kg (24,9 lb)	22,1 kg (48,7 lb)

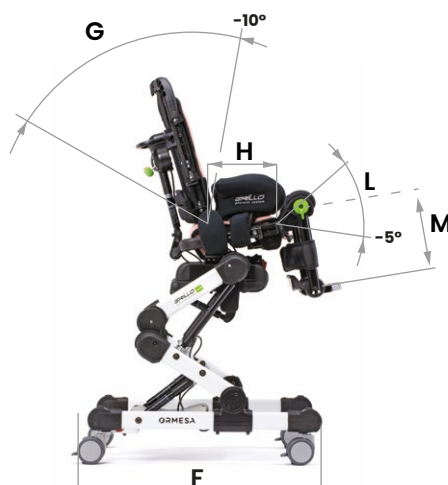

Seating unit on indoor base



A	B	C	D	E	F	G	H	I	L	M	N	Frame weight	Seating unit weight	Total weight
38 (15)	20-30 (7,8-11,8)	53 (20,8)	48-62 (18,8-24,4)	45-65 (17,7-25,5)	65 (25,5)	45°	20-30 (7,8-11,8)	13-16,5 (5,1-6,4)	40°	21-31 (8,2-12,2)	40 (15,7)	14,3 kg (31,5 lb)	11,3 kg (24,9 lb)	25,6 kg (56,4 lb)

ADDITIONAL COMPONENTS for both BASES

☐ **863 Postural headrest**
adjustable in height, width, tilt and depth,
with adjustable side supports.
Size mini/S.



☐ **942 Ergonomic and mouldable headrest** adjustable in height, tilt and forward-backward with adjustable sides. Size mini/S.



835 Padded shaped headrest, adjustable in height.

☐ mini ☐ S/M



☐ **852 Headrest with parietal supports** adjustable in width. Size mini/S.




838 Trunk side supports adjustable in height, width and transversally.

☐ mini ☐ S



967 Shoulders lateral supports. Standard on outdoor base.

☐ Optional component for the indoor base

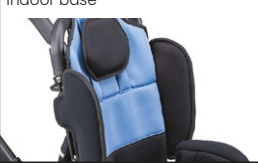

868 Wrappable and flexible trunk supports adjustable in height, width and transversally.

☐ mini ☐ S/M



853 Vest harness

☐ mini ☐ S



947 pelvic belt with variable angle as standard.

☐ mini ☐ S



☐ **920 Four point pelvic belt**



☐ **834N Padded narrow abduction block.** Size mini/S.



☐ **834R Adjustable abduction block.** Size mini/S.



☐ **969 Postural pads kit.**



☐ **824 Transparent tray** adjustable in height, depth and tilt.



☐ **827 Foot straps** for single footrest.



☐ **892 Padded footplate covering**, for single footrest. Removable for washing.



☐ **957 Legrest with separate footrests.** Adjustable in height, inclination and abduction independently.



☐ **960 Heelrests.** Only with legrest 957.



☐ **962 Footrests + Heelrests.** Only with legrest 957.



ADDITIONAL COMPONENTS for OUTDOOR BASE

☐ **839 Padded front handle** Adjustable in height and tilt.



☐ **819 Versatile canopy.**



☐ **825 Rain cover.** Only with canopy 819.



☐ **891 Set of 4 tie down hooks** for the forward-facing transport of the pushchair in a motor vehicle (cars, buses...)



COMPLIANT WITH
ISO 7176/19 and
ANSI RESNA WC/19
STANDARDS



☐ **818 Padded thermal cover.**



☐ **858 Shopping and vent tray basket.**



☐ **935 Oxygen bottle holder.**




☐ **922 Bottle holder.**



905 Hand brake.

☐ Lever Right ☐ Lever Left

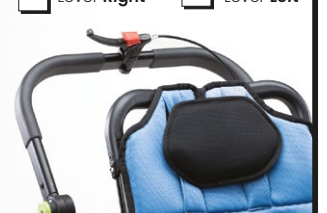

ADDITIONAL COMPONENTS for INDOOR BASE

☐ **961** Elbow side supports.
Height adjustable.




☐ **824B** Wide, resistant and hygienic table, suitable for food contact.
Multiadjustable.




COMPONENTS MEASURES


863

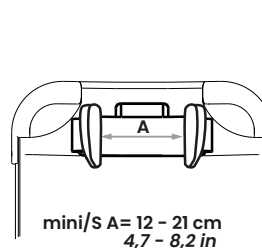


mini/S A= 12 - 21 cm
4,7 - 8,2 in

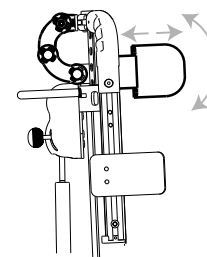


942

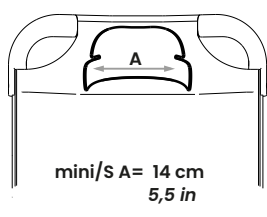

mini/S A= 14 cm
5,5 in

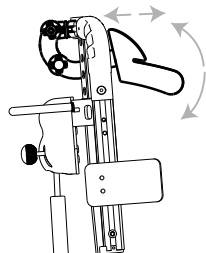


852

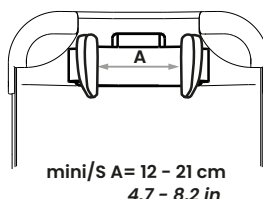

mini/S A= 12 - 21 cm
4,7 - 8,2 in

835

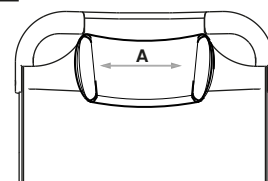


mini A= 16 cm/6,3 in
S/M A= 18 cm/7 in

947




mini A= 16 cm/6,2 in
B= 5 cm/1,9 in
Small A= 19 cm/7,4 in
B= 6 cm/2,3 in

868




mini A= 23 cm/9 in
B= 9 cm/3,5 in
Small A= 26 cm/10,2 in
B= 9 cm/3,5 in

920

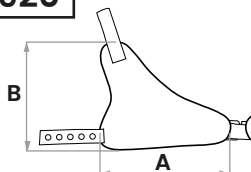

Small A= 16 cm/6,2 in
B= 15,5 cm/6 in


838

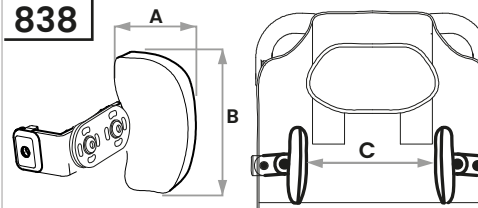

mini A= 9 cm/3,5 in
B= 7 cm/2,7 in
Small A= 10 cm/3,9 in
B= 12 cm/4,7 in
C=20-30 cm/7,8-11,8 in


853

mini A= 20,5 cm/8 in
B= 28 cm/11 in
Small A= 25 cm/9,8 in
B= 34 cm/13,3 in




969

A= 22 cm/8,6 in
B= 9 cm/3,5 in
C= 2,5/0,9 in
D= 10 cm/3,9 in
E= 35 cm/13,7 in
F= 2 cm/0,7 in

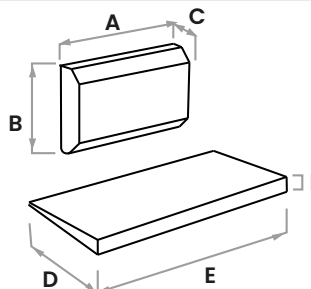


834R

mini/Small A= 12 cm/4,7 in
B= 8-10 cm/3,1-3,9 in
C= 9 cm/3,5 in




834N

mini/Small A= 12 cm/4,7 in
B= 4 cm/1,5 in
C= 14 cm/5,5 in




824B

A= 16 cm/6,2 in
B= 38 cm/14,9 in
C= 53 cm/20,8 in
D= 64 cm/25,1 in

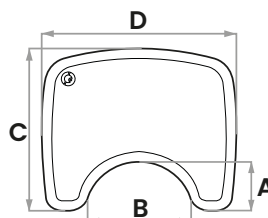


824

A= 10 cm/3,9 in
B= 25 cm/9,8 in
C= 33 cm/12,9 in
D= 43 cm/16,9 in

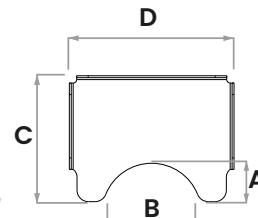

858


A= 16 cm/6,2 in
B= 40 cm/15,7 in
C= 27 cm/10,6 in



5 kg./11 lb

957

A= 15° of abduction on indoor base
A= 5° of abduction on outdoor base



Notes:

.....

.....

.....

.....

.....

.....